



Operator's Guide to PowerVac Rotary Polishers

1. Tilt the machine back using the handle.
2. Locate Pad Holder or Brush by slotting grooves together and spinning the accessory anticlockwise to lock in place.
3. Once the required accessory is fitted stand the machine back up.
4. Position the machine to commence operation.
5. Fully unwind cable, checking for any signs of damage. If OK plug in, if damaged arrange replacement immediately.
6. Adjust the handle by pulling the lever (#1) on the right hand side up. Handle should be adjusted to suit individual operator's proportions.

HINT: Handle should be at approximately groin level or with operator's arms slightly bent.

Arms should grip handle in comfortable but loose manner, **control of the machine is based on balance not strength**

7. To start the machine push the safety switch on the back right hand side of the handle, this will allow you to use the triggers (#2) on the underside to engage the brush. Once the machine is running the safety button can be released.
8. To facilitate the correct swinging motion of the machine:


Lift the handle slightly forward to move right

Lower the handle to move machine left

This should require minimal effort so if you have to fight the machine for control you have the handle set at the wrong height, the pad or brush may not be correctly fitted, or may need replacement.

9. **Always remove Pad Holder after use** and before storing the machine. Gently wind cable around bracket on handle of the machine.

RE-ORDER CODE FOR PADS: PMP400R (SUPPLIED IN BOXES OF 5)

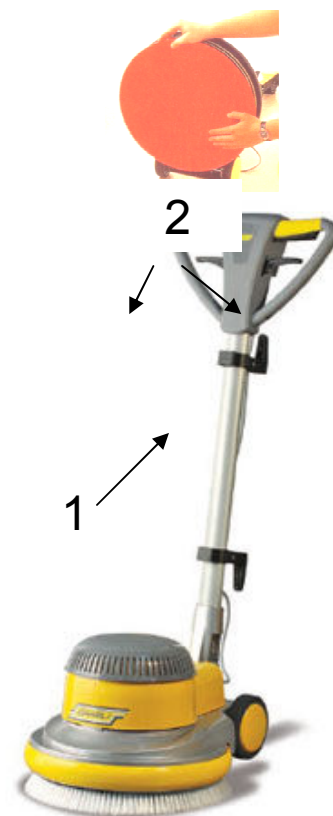

Backpack & Industrial Vacuums



Pressure Washers



Scrubbers



Sweepers



Polishers



Carpet Cleaners