

HDS 10/21-4 CLASSIC

KÄRCHER

Reliable, easy to operate with an excellent price/performance ratio. This hot water pressure washer is equipped with a high-quality crankshaft pump as well as a robust tubular steel frame.



Order No. 1.030-911.0

- Powerful design, water-cooled 4-pole electric motor with crankshaft pump
- Tubular steel frame with crane hook, 10-metre-long high-pressure hose
- Classic trigger gun and spray lance, 30-litre fuel tank, puncture-proof wheels

Technical data

EAN code		4054278956145
Number of phases	Phases	3
Voltage	Volt	400
Frequency	Hertz	50
Flow rate	Litres per hour	350 - 1000
Working pressure	Bar / Mega pascal	30 - 210 / 3 - 21
Max. pressure	Bar	235
Temperature (feed 12 °C)	Celsius	Maximum 80
Connected load	Kilowatt	8
Consumption of fuel oil at full load	Kilograms per hour	6.4
Heating oil consumption, ecoefficiency	Kilograms per hour	5.2
Power cable	Metre	5
Fuel tank	Litre	30
Weight (with accessories)	Kilogram	128
Weight incl. packaging	Kilogram	137.981
Dimensions (L × W × H)	Millimetre	1075 × 722 × 892


This machine requires instruction.

Scope of supply

Spray gun: Standard
High-pressure hose length: 10 Metre
High-pressure hose specification: DN 8, 315 bar
Spray lance: 1050 Millimetre
Power nozzle

Equipment

ANTI!Twist
Pressure cut-off
Pole reversing plug (3-phase)

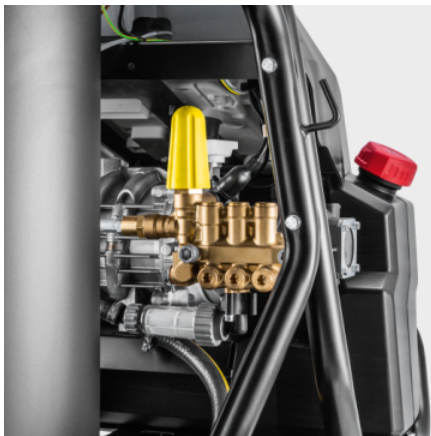

Robust and long-lasting

- Robust crankshaft pump with proven Kärcher quality.
- A robust tubular steel frame reliably protects the machine against damage.
- Good accessibility for easy service and maintenance.



Efficient burner engineering

- High degree of efficiency with low emissions and long life.
- Long work applications thanks to 30-l fuel tank.
- In the Eco mode, the unit operates in the most economical temperature range (60°C) with full water flow.



Classic accessories with EASY!Lock connections

- Quick set-up and pack-up plus easy accessory replacement.
- Robust and durable accessories.
- Easy and intuitive to operate.