

HD 6/15-4 M CLASSIC

KÄRCHER

Robust, versatile high-pressure cleaner with steel frame, 4-pole low-speed motor, crankshaft pump with brass cylinder head for long downtime and low maintenance effort.



Order No.

1.367-900.0

- Robust, versatile high-pressure cleaner with steel frame
- Brass cylinder head, pressure cut-off, low maintenance effort
- 10-metre-long high-pressure hose, Power nozzle

Technical data

EAN code		4066529003942
Number of phases	Phases	1
Voltage	Volt	216 - 244
Frequency	Hertz	50
Flow rate	Litres per hour	450 - 600
Inlet temperature	Celsius	60
Working pressure	Bar	70 - 150
Max. pressure	Bar	190
Connected load	Kilowatt	3.4
Power cable	Metre	5
Nozzle size		036
Water inlet		1"
Colour		anthracite
Weight (with accessories)	Kilogram	51.6
Weight incl. packaging	Kilogram	64.62
Dimensions (L x W x H)	Millimetre	740 x 528 x 952

Scope of supply

Spray gun: Standard
Spray lance: 840 Millimetre
Power nozzle


Equipment

High-pressure hose length: 10 Metre
High-pressure hose specification: DN 8, 315 bar
Pressure cut-off
Infinitely variable pressure and water flow regulation




4-pole low-speed electric motor

- Reduced motor speed for less pump wear.
- Long engine life.
- Only very low engine vibrations.

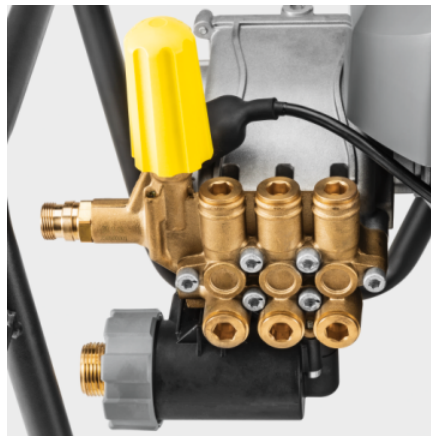

Robust crankshaft pump with brass cylinder head

- Long service life and low maintenance costs.
- Pressure and water volume can be adjusted on the pump itself.
- With suction feature and up to 60 °C water temperature.

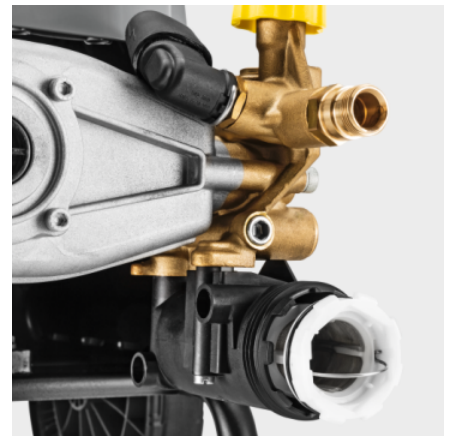

Easy service

- All important components are accessible in a few easy steps.
- The filling level and quality of the oil are easy to read thanks to the inspection glass.
- Integrated water filter can be removed and cleaned without any tools.