

HDS 6/15-4 C CLASSIC

KÄRCHER

HDS 6/15-4 C Classic single-phase hot water high-pressure cleaner in the compact class with a durable crankshaft pump, robust tubular steel frame and offering excellent value for money.



Order No. **1.030-914.0**

- Powerful design, water-cooled 4-pole electric motor with crankshaft pump
- Tubular steel frame with crane hook, 10-metre-long high-pressure hose
- Classic trigger gun and spray lance, 30-litre fuel tank, puncture-proof wheels

Technical data		
EAN code		4054278956176
Number of phases	Phases	1
Voltage	Volt	230
Frequency	Hertz	50
Flow rate	Litres per hour	300 - 600
Working pressure	Bar / Mega pascal	30 - 150 / 3 - 15
Max. pressure	Bar	200
Temperature (feed 12 °C)	Celsius	Maximum 80
Connected load	Kilowatt	3.6
Consumption of fuel oil at full load	Kilograms per hour	3.9
Heating oil consumption, ecoefficiency	Kilograms per hour	3.2
Power cable	Metre	5
Nozzle size		025
Fuel tank	Litre	30
Weight (with accessories)	Kilogram	108
Weight incl. packaging	Kilogram	117.981
Dimensions (L × W × H)	Millimetre	1075 × 722 × 915


This machine requires instruction.

Scope of supply	
Spray gun:	Standard hot water
Spray lance:	840 Millimetre
Equipment	
High-pressure hose length:	10 Metre
Pressure cut-off	



Robust and long-lasting

- A robust tubular steel frame reliably protects the machine against damage.
- Good accessibility for easy service and maintenance.

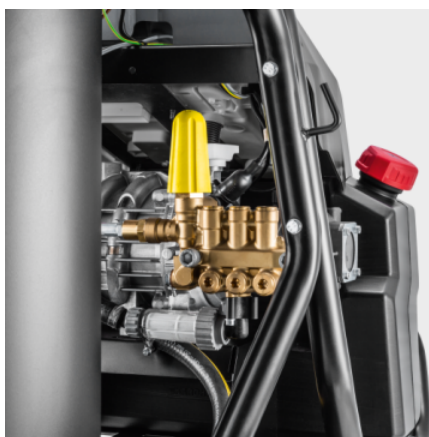

Reliability

- Robust crankshaft pump with proven Kärcher quality.
- Proven safety technology such as thermo and safety valve and water filter.



Efficient burner engineering

- High degree of efficiency with low emissions and long life.
- Long work applications thanks to 30-l fuel tank.
- In the Eco mode, the unit operates in the most economical temperature range (60°C) with full water flow.